







GRADO TWIN

oktalite

www.oktalite.com/grado-twin-t

Type of luminaire	track light
Application areas	Aisle zone illumination, base illumination
Pan/tilt range	swivel range 220°
Mounting	3P Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	3000 lm - 5000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K, 4000 K - Efficient Cool
Cooling	passive
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	Approx. 2.7 kg
Components	 Luminaire housing
Test seal	  



Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-15

**GRADO TWIN****oktalite**

LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
3000 lm	3000 K - Brilliant Colour	97	2 x 3065 lm	64 W	14	10187340	10187341	10187342
4000 lm	2700 K	81	2 x 3875 lm	56 W	14	10187364	10187332	10187333
	3000 K	83	2 x 3985 lm	56 W	14	10187334	10187335	10187336
	3000 K - Efficient White	94	2 x 4090 lm	68 W	9	10187337	10187338	10187339
	3500 K	85	2 x 4065 lm	56 W	14	10187343	10187344	10187345
	4000 K	83	2 x 4200 lm	56 W	14	10187346	10187347	10187348
	4000 K - Efficient Cool	91	2 x 4300 lm	68 W	9	10249804	10249805	10249806
5000 lm	2700 K	81	2 x 4720 lm	72 W	9	10187349	10187350	10187351
	3000 K	83	2 x 4855 lm	72 W	9	10187352	10187353	10187354
	3500 K	85	2 x 4950 lm	72 W	9	10187358	10187359	10187360
	4000 K	83	2 x 5115 lm	72 W	9	10187361	10187362	10187363


Efficient White: R₉ = 75, R_r = 91, R_g = 102Brilliant Colour: R₉ = 94, R_r = 95, R_g = 104

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-15

Optic GRADO TWIN - LED

oktalite

Optic Specially designed reflector
 Type Optic integrated

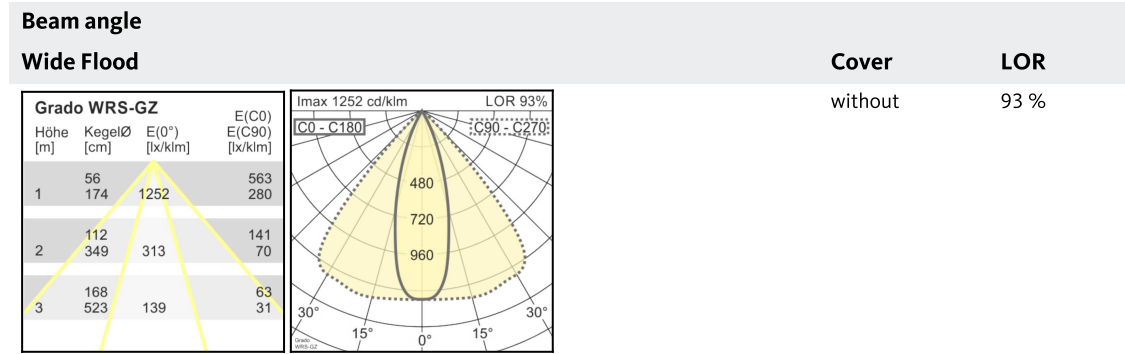

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-15