



MUCH MOON

SUSPENDED LUMINAIRE

From special edition to standard: MUCH MOON has seized its place in the portfolio. The decorative suspended luminaire with a visible light surface offers creative design options for many applications thanks to different rod lengths and variable installation options. Be it Food, Fashion, Architectural, Office or Showroom – the controllable lighting installation MUCH MOON with high-level aesthetics creates representative and attention-grabbing areas in any room.



Flexible suspension lengths

Variability from 60 cm to 2 m. On request even longer, up to a maximum of 4 meters



Two luminaire sizes

Luminaire diameter of 165 mm and 240 mm for flexible architectural design



Three installation types

From recessed and surface-mounted to 3-phase track






Large LED selection

In light colours 3,000 K, 4,000 K or ACTIVE (2,700 - 6,000 K)









Smart light


Ideal light management at all times with LED^{IQ} DALI or LED^{IQ} BLE



MUCH MOON

www.oktalite.com/much-moon-p

Type of luminaire	suspended luminaire
Application areas	base illumination
Pan/tilt range	fixed
Mounting	3P Power Track, not suitable for vertical mounting, recessed (Ø 130mm), Surface mounted
Ceiling thickness	1 - 25 mm
Lighting technology	LED ^{IQ} BLE
LED Luminous Flux Class	2000 lm - 3000 lm
Light colour White	3000 K, 4000 K, Active 2700-6000 K
Cooling	passive
Supply unit	BLE-Driver separate, DALI driver separate
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	Bluetooth Low Energy
Installation	Recommended for modernization or new installation. In a BLE network up to 127 luminaires can be coupled. A stable Bluetooth connection depends on the particular local situation. In the case of this luminaire type it amounts to up to 25m (recessed) / 7.5m (surface mounted).
Weight	2,0 kg / 2,8 kg
Components	 Luminaire housing  Suspensions  Supply unit
Test seal	   

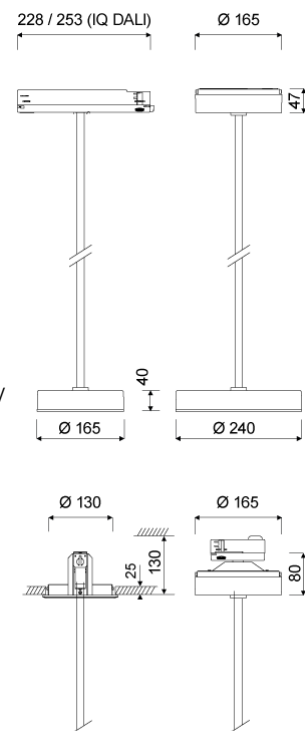

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of /- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29

**MUCH MOON****oktalite**

Size	LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	Order number		
						white	silver	black
Ø 165 mm	2000 lm	3000 K	> 80	1685 lm	17 W	10236795		10236796
Ø 165 mm		4000 K	> 80	1770 lm	17 W	10236797		10236798
Ø 165 mm		Active 2700-6000 K	> 80	-	17 W	10236799		10236800
Ø 165 mm		2700 K	> 80	1635 lm				
Ø 165 mm		6000 K	> 80	1770 lm				
Ø 240 mm	3000 lm	3000 K	> 80	2545 lm	22 W	10236801		10236802
Ø 240 mm		4000 K	> 80	2675 lm	22 W	10236803		10236804
Ø 240 mm		Active 2700-6000 K	> 80	-	22 W	10236805		10236806
Ø 240 mm		2700 K	> 80	2470 lm				
Ø 240 mm		6000 K	> 80	2675 lm				

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29

Optic Much Moon - LED ^{IQ} BLE


oktalite

Optic Diffuser (opal)
Type Optic integrated

Beam angle

Lambertian light distribution (Ø165mm)


Cover without
LOR 100 %

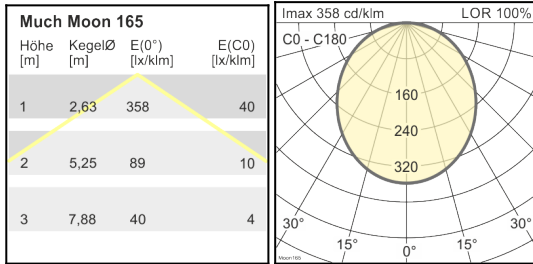

Beam angle

Lambertian light distribution (Ø240mm)

Cover without
LOR 100 %

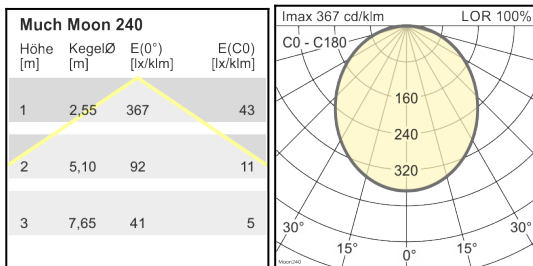

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29



Mounting - LED^{IQ} BLE

pendulum bar

oktalite

Suspension length	Order number	
	white	black
600 mm	10236807	10236808
800 mm	10236809	10236810
1000mm	10236811	10236812
1200 mm	10236813	10236814
1400 mm	10236815	10236816
1600 mm	10236817	10236818
1800 mm	10236819	10236820
2000 mm	10236821	10236822

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29



BLE-Driver

oktalite

Version	Ceiling fixing incl. control gear
Luminaire connection	jack TRRS
Cable length secondary	400 mm
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	Bluetooth Low Energy
Lighting technology	LED ^{IQ} BLE

Mounting	Mains connection	Output	System performance	max. luminaires B16	Order number	
					white	black
3P Power Track (l=228mm)	GA69	600 mA	17 W	50	10236827	10236828
3P Power Track H17	GA69 (Active)	600 mA	17 W	16	10236829	10236830
Surface mounted H17	1x3pol	600 mA	17 W	50	10236835	10236836
Surface mounted H17	1x3pol (Active)	600 mA	17 W	16	10236837	10236838
recessed (Ø 130mm)	GST 18i3	600 mA	17 W	50	10236843	10236844
recessed (Ø 130mm)	GST 18i3 (Active)	600 mA	17 W	16	10236845	10236846
3P Power Track (l=228mm)	GA69	600 mA	22 W	50	10236827	10236828
3P Power Track H17	GA69 (Active)	600 mA	22 W	16	10236829	10236830
Surface mounted H17	1x3pol	600 mA	22 W	50	10236835	10236836
Surface mounted H17	1x3pol (Active)	600 mA	22 W	16	10236837	10236838
recessed (Ø 130mm)	GST 18i3	600 mA	22 W	50	10236843	10236844
recessed (Ø 130mm)	GST 18i3 (Active)	600 mA	22 W	16	10236845	10236846

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2022-11-29