

LENTY PLUS TRACK

oktalite

www.oktalite.com/lenty-plus-track-t

Type of luminaire	track light
Application areas	Accent lighting
Pan/tilt range	355° turning range, 100° swivel range
Mounting	3P Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	2000 lm - 4000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K, 4000 K - Efficient Cool
Light colour Food*	BF
Cooling	passive
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	Approx. 1.0 kg
Components	




Luminaire housing

Test seal



* BF = Brilliant Food

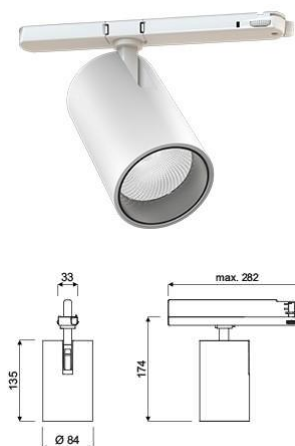

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of /- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Luminaire housing - LED

LENTY PLUS TRACK

oktalite

Beam angle

Spot



LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
2000 lm	2700 K	> 80	1810 lm	13 W	27	10296169		10296172
2000 lm	3000 K	> 80	1910 lm	13 W	27	10296175		10296178
2000 lm	3000 K - Efficient White	> 90	1875 lm	15 W	27	10296181		10296184
2000 lm	3000 K - Brilliant Colour	> 95	1845 lm	19 W	27	10296187		10296190
2000 lm	3500 K	> 80	1940 lm	13 W	27	10296193		10296196
2000 lm	4000 K	> 80	1975 lm	13 W	27	10296199		10296202
2000 lm	4000 K - Efficient Cool	> 90	1940 lm	15 W	27	10296205		10296208
3000 lm	2700 K	> 80	2495 lm	19 W	27	10296217		10296220
3000 lm	3000 K	> 80	2630 lm	19 W	27	10296223		10296226
3000 lm	3000 K - Efficient White	> 90	2725 lm	22 W	27	10296229		10296232
3000 lm	3000 K - Brilliant Colour	> 95	2810 lm	30 W	27	10296235		10296238
3000 lm	3500 K	> 80	2670 lm	19 W	27	10296241		10296244
3000 lm	4000 K	> 80	2725 lm	19 W	27	10296247		10296250
3000 lm	4000 K - Efficient Cool	> 90	2780 lm	22 W	27	10296253		10296256
4000 lm	2700 K	> 80	3345 lm	26 W	27	10296265		10296268
4000 lm	3000 K	> 80	3525 lm	26 W	27	10296271		10296274
4000 lm	3000 K - Efficient White	> 90	3515 lm	30 W	27	10296277		10296280
4000 lm	3500 K	> 80	3585 lm	26 W	27	10296283		10296286
4000 lm	4000 K	> 80	3650 lm	26 W	27	10296289		10296292
4000 lm	4000 K - Efficient Cool	> 90	3560 lm	30 W	27	10296295		10296298
2000 lm	BF	> 95	1765 lm	19 W	27	10296211		10296214
3000 lm	BF	> 95	2650 lm	30 W	27	10296259		10296262

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Luminaire housing - LED

LENTY PLUS TRACK

oktalite

Beam angle

Medium Flood



LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
2000 lm	2700 K	> 80	1810 lm	13 W	27	10296170		10296173
2000 lm	3000 K	> 80	1905 lm	13 W	27	10296176		10296179
2000 lm	3000 K - Efficient White	> 90	1870 lm	15 W	27	10296182		10296185
2000 lm	3000 K - Brilliant Colour	> 95	1840 lm	19 W	27	10296188		10296191
2000 lm	3500 K	> 80	1935 lm	13 W	27	10296194		10296197
2000 lm	4000 K	> 80	1975 lm	13 W	27	10296200		10296203
2000 lm	4000 K - Efficient Cool	> 90	1940 lm	15 W	27	10296206		10296209
3000 lm	2700 K	> 80	2490 lm	19 W	27	10296218		10296221
3000 lm	3000 K	> 80	2625 lm	19 W	27	10296224		10296227
3000 lm	3000 K - Efficient White	> 90	2725 lm	22 W	27	10296230		10296233
3000 lm	3000 K - Brilliant Colour	> 95	2805 lm	30 W	27	10296236		10296239
3000 lm	3500 K	> 80	2670 lm	19 W	27	10296242		10296245
3000 lm	4000 K	> 80	2720 lm	19 W	27	10296248		10296251
3000 lm	4000 K - Efficient Cool	> 90	2780 lm	22 W	27	10296254		10296257
4000 lm	2700 K	> 80	3340 lm	26 W	27	10296266		10296269
4000 lm	3000 K	> 80	3520 lm	26 W	27	10296272		10296275
4000 lm	3000 K - Efficient White	> 90	3510 lm	30 W	27	10296278		10296281
4000 lm	3500 K	> 80	3580 lm	26 W	27	10296284		10296287
4000 lm	4000 K	> 80	3650 lm	26 W	27	10296290		10296293
4000 lm	4000 K - Efficient Cool	> 90	3555 lm	30 W	27	10296296		10296299
2000 lm	BF	> 95	1765 lm	19 W	27	10296212		10296215
3000 lm	BF	> 95	2650 lm	30 W	27	10296260		10296263

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Luminaire housing - LED

LENTY PLUS TRACK

oktalite

Beam angle

Flood



LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
2000 lm	2700 K	> 80	1830 lm	13 W	27	10296171		10296174
2000 lm	3000 K	> 80	1930 lm	13 W	27	10296177		10296180
2000 lm	3000 K - Efficient White	> 90	1895 lm	15 W	27	10296183		10296186
2000 lm	3000 K - Brilliant Colour	> 95	1865 lm	19 W	27	10296189		10296192
2000 lm	3500 K	> 80	1965 lm	13 W	27	10296195		10296198
2000 lm	4000 K	> 80	2000 lm	13 W	27	10296201		10296204
2000 lm	4000 K - Efficient Cool	> 90	1965 lm	15 W	27	10296207		10296210
3000 lm	2700 K	> 80	2525 lm	19 W	27	10296219		10296222
3000 lm	3000 K	> 80	2660 lm	19 W	27	10296225		10296228
3000 lm	3000 K - Efficient White	> 90	2760 lm	22 W	27	10296231		10296234
3000 lm	3000 K - Brilliant Colour	> 95	2845 lm	30 W	27	10296237		10296240
3000 lm	3500 K	> 80	2705 lm	19 W	27	10296243		10296246
3000 lm	4000 K	> 80	2760 lm	19 W	27	10296249		10296252
3000 lm	4000 K - Efficient Cool	> 90	2815 lm	22 W	27	10296255		10296258
4000 lm	2700 K	> 80	3385 lm	26 W	27	10296267		10296270
4000 lm	3000 K	> 80	3570 lm	26 W	27	10296273		10296276
4000 lm	3000 K - Efficient White	> 90	3560 lm	30 W	27	10296279		10296282
4000 lm	3500 K	> 80	3625 lm	26 W	27	10296285		10296288
4000 lm	4000 K	> 80	3700 lm	26 W	27	10296291		10296294
4000 lm	4000 K - Efficient Cool	> 90	3605 lm	30 W	27	10296297		10296300
2000 lm	BF	> 95	1785 lm	19 W	27	10296213		10296216
3000 lm	BF	> 95	2685 lm	30 W	27	10296261		10296264

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Efficient White: $R_9 = 75$, $R_f = 91$, $R_g = 102$



Brilliant Colour: $R_9 = 94$, $R_f = 95$, $R_g = 104$

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (t_a) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of $\pm 10\%$. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02

Optic Lenty Plus - LED

oktalite

Optic

Lens optic

Type

Optic integrated

Beam angle


Spot

Cover

LOR

without

85 %

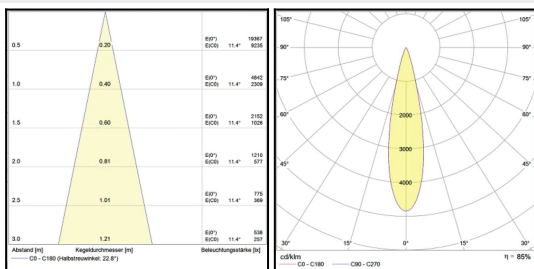

Beam angle


Medium Flood

Cover

LOR

without

85 %

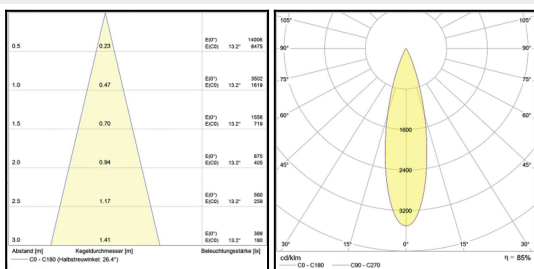

Beam angle


Flood

Cover

LOR

without

86 %

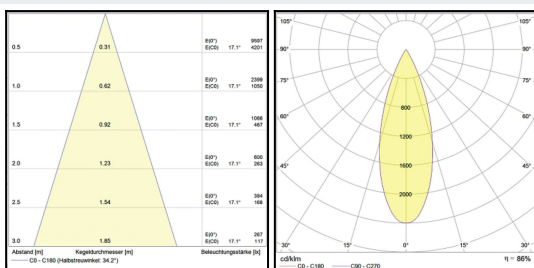

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02