


LENTY PLUS TRACK

oktalite

www.oktalite.com/lenty-plus-track-t

Type of luminaire	track light
Application areas	Accent lighting
Pan/tilt range	355° turning range, 100° swivel range
Mounting	3P Power Track Typ Global DALI, not suitable for vertical mounting
Lighting technology	LED ^{IQ} DALI
LED Luminous Flux Class	3000 lm - 4000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K, 4000 K - Efficient Cool
Light colour Food*	BF
Cooling	passive
Supply unit	DALI driver integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	DALI DT6
Installation	Recommended for new installation.
Weight	Approx. 1.0 kg
Components	 Luminaire housing
Test seal	   

* BF = Brilliant Food



Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90· Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Luminaire housing - LED ^{IQ} DALI

LENTY PLUS TRACK

oktalite

Beam angle

Spot



LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
3000 lm	3000 K - Brilliant Colour	> 95	2810 lm	30 W	27	10296367		10296370
4000 lm	2700 K	> 80	3345 lm	26 W	27	10296349		10296352
4000 lm	3000 K	> 80	3525 lm	26 W	27	10296355		10296358
4000 lm	3000 K - Efficient White	> 90	3515 lm	30 W	27	10296361		10296364
4000 lm	3500 K	> 80	3585 lm	26 W	27	10296373		10296376
4000 lm	4000 K	> 80	3650 lm	26 W	27	10296379		10296382
4000 lm	4000 K - Efficient Cool	> 90	3560 lm	30 W	27	10296385		10296388
3000 lm	BF	> 95	2650 lm	30 W	27	10296391		10296394

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Luminaire housing - LED ^{IQ} DALI

LENTY PLUS TRACK

oktalite

Beam angle

Medium Flood



LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
3000 lm	3000 K - Brilliant Colour	> 95	2805 lm	30 W	27	10296368		10296371
4000 lm	2700 K	> 80	3340 lm	26 W	27	10296350		10296353
4000 lm	3000 K	> 80	3520 lm	26 W	27	10296356		10296359
4000 lm	3000 K - Efficient White	> 90	3510 lm	30 W	27	10296362		10296365
4000 lm	3500 K	> 80	3580 lm	26 W	27	10296374		10296377
4000 lm	4000 K	> 80	3650 lm	26 W	27	10296380		10296383
4000 lm	4000 K - Efficient Cool	> 90	3555 lm	30 W	27	10296386		10296389
3000 lm	BF	> 95	2650 lm	30 W	27	10296392		10296395

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Luminaire housing - LED^{IQ} DALI

LENTY PLUS TRACK

oktalite

Beam angle

Flood



LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
3000 lm	3000 K - Brilliant Colour	> 95	2845 lm	30 W	27	10296369		10296372
4000 lm	2700 K	> 80	3385 lm	26 W	27	10296351		10296354
4000 lm	3000 K	> 80	3570 lm	26 W	27	10296357		10296360
4000 lm	3000 K - Efficient White	> 90	3560 lm	30 W	27	10296363		10296366
4000 lm	3500 K	> 80	3625 lm	26 W	27	10296375		10296378
4000 lm	4000 K	> 80	3700 lm	26 W	27	10296381		10296384
4000 lm	4000 K - Efficient Cool	> 90	3605 lm	30 W	27	10296387		10296390
3000 lm	BF	> 95	2685 lm	30 W	27	10296393		10296396



Efficient White: R₉ = 75, R_f = 91, R_g = 102



Brilliant Colour: R₉ = 94, R_f = 95, R_g = 104

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02



Optic - LED ^{IQ} DALI

Optic Lenty Plus - LED ^{IQ} DALI

oktalite

Optic


Lens optic

Type

Optic integrated

Beam angle

Spot

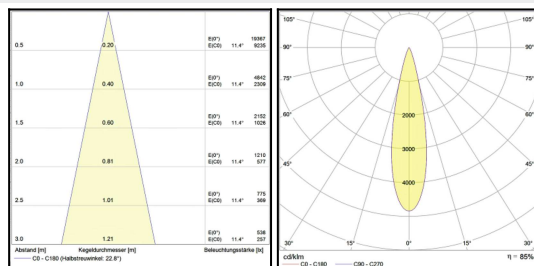

Cover


without

LOR

85 %

Beam angle

Medium Flood

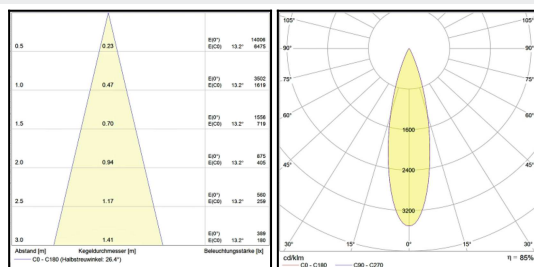

Cover


without

LOR

85 %

Beam angle

Flood

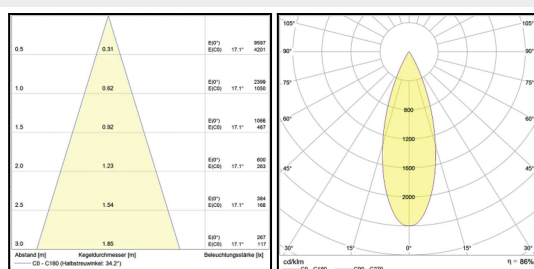

Cover

without

LOR

86 %

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. The Single Lighting Regulation (SLR) documentation can be found in our download area. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T 49 221 59767-0 · F 49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2023-05-02