



LIMBA

SUSPENDED LUMINAIRES

LIMBA – Suspended luminaire for professional accentuated lighting in vintage design. The lampshade made of aluminium is as standard coloured on the outside and white on the inside and a textile cable underscores the high-quality appearance. In that way LIMBA becomes a decorative eyecatcher. Individual colour combinations are possible on request.



Ideal applications

A decorative eyecatcher to round off the store design
Vintage look meets modern technology



Customised style

The selection of cable and shade colours permits personal colour schemes: design your own personal LIMBA with the Style Generator!



Wide LED range

Large choice between professional LED equipment and filament lamps for E27 socket






High lighting quality

Opal acrylic ring for perfect glare suppression and long-distance effect



Fast reflector replacement

Five beam angles for optimum goods illumination



LIMBA




oktalite

www.oktalite.com/limba-p


Type of luminaire	Suspended luminaires
Application areas	Decorative lighting
Pan/tilt range	fixed
Mounting	3-circuit power track adapter, Recessed plate bayonet, Surface-mounting rosette

Ceiling thickness	1 - 25 mm
Lighting technology	E27
Lamp power	max. 60 W
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request

Surface	structure powder-coated
Suspension length	1500mm, 3000mm
Nominal voltage	220 - 240 V, 50/60Hz
Weight	Approx. 2.4 kg

Components	 Luminaire housing  Optic  Lamp
------------	--

Test seal	   
-----------	---

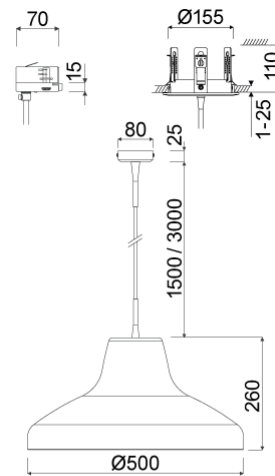

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2019-06-16



Lighting technology	Mounting	Mount Color	Suspension length	Order number		
				white	silver	black
E27	3-circuit track adapter	RAL 9016 traffic white	1500mm	10160170		
E27	3-circuit track adapter	RAL 9016 traffic white	3000mm	10160171		
E27	3-circuit track adapter	RAL 9005 jet black	1500mm			10160172
E27	3-circuit track adapter	RAL 9005 jet black	3000mm			10160173
E27	ceiling canopy H3	RAL 9016 traffic white	1500mm	10160174		
E27	ceiling canopy H3	RAL 9016 traffic white	3000mm	10160175		
E27	ceiling canopy H3	RAL 9005 jet black	1500mm			10160176
E27	ceiling canopy H3	RAL 9005 jet black	3000mm			10160177
E27	Recessed plate bayonet H10 (Ø 155mm)	RAL 9016 traffic white	1500mm	10160178		
E27	Recessed plate bayonet H10 (Ø 155mm)	RAL 9016 traffic white	3000mm	10160179		
E27	Recessed plate bayonet H10 (Ø 155mm)	RAL 9005 jet black	1500mm			10160180
E27	Recessed plate bayonet H10 (Ø 155mm)	RAL 9005 jet black	3000mm			10160181

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2019-06-16



Lamp - E27

E27

oktalite

Lumen category	Light colour	Lamp power	CRI [RA]	Manufacturer	Lamp surface	Dimmable	Order number
806 lm	2700 K	6 W	82	Osram	clear filament	non-dimmable	10159960
1055 lm	2700 K	12 W	82	Osram	matt	dimmable	10159962

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2019-06-16