






JUNO


TRACK LIGHT


"Systematic illumination of goods thanks to optimum light distribution with visible free-form lens: track-mounted spotlight JUNO provides retail

- 



Optimum light distribution
By means of novel directional lighting control with free-form lens instead of a reflector
- 

Ideal applications
Systematic illumination of goods on back walls or on promotional areas
- 





New design language
With visible, teardrop-shaped lens and significant long-distance effect
- 


Easy alignment
Spotlight head that can be swivelled though 40°; easy, precise adjustment thanks to scale
- 

Intelligent lighting
LED^{IQ} for your smart lighting management system



www.oktalite.com/juno-t

Type of luminaire	track light
Application areas	Aisle zone illumination, base illumination
Pan/tilt range	355° turning range, 80° swivel range
Mounting	3P Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	3000 lm - 5000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3500 K, 4000 K
Cooling	passive
Supply unit	Driver integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	Approx. 1.7 kg
Components	 Luminaire housing
Test seal	  

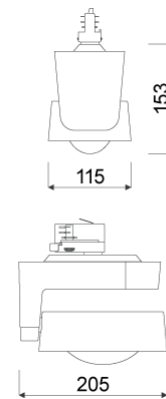

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2020-11-26

**JUNO****oktalite**

LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
3000 lm	2700 K	81	2485 lm	21 W	25	10221396	10221397	10221398
	3000 K	83	2555 lm	21 W	25	10221399	10221400	10221401
	3000 K - Efficient White	94	2585 lm	25 W	25	10221402	10221403	10221404
	3500 K	84	2610 lm	21 W	25	10221405	10221406	10221407
	4000 K	83	2695 lm	21 W	25	10221408	10221409	10221410
4000 lm	2700 K	81	3250 lm	28 W	25	10221411	10221412	10221413
	3000 K	83	3340 lm	28 W	25	10221414	10221415	10221416
	3000 K - Efficient White	94	3400 lm	34 W	24	10221417	10221418	10221419
	3500 K	84	3405 lm	28 W	25	10221420	10221421	10221422
	4000 K	83	3520 lm	28 W	25	10221423	10221424	10221425
5000 lm	2700 K	81	3950 lm	36 W	23	10221426	10221427	10221428
	3000 K	83	4060 lm	36 W	23	10221429	10221430	10221431
	3000 K - Efficient White	94	4260 lm	46 W	30	10229267	10229268	10229269
	3500 K	84	4140 lm	36 W	23	10221432	10221433	10221434
	4000 K	83	4280 lm	36 W	23	10221435	10221436	10221437

Efficient White: R_s = 75, R_i = 91, R_g = 102

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2020-11-26

Optic Juno - LED

oktalite

Optic Freeform lens
 Type Optic integrated

Beam angle


Oval light distribution

Cover

LOR

without

78 %

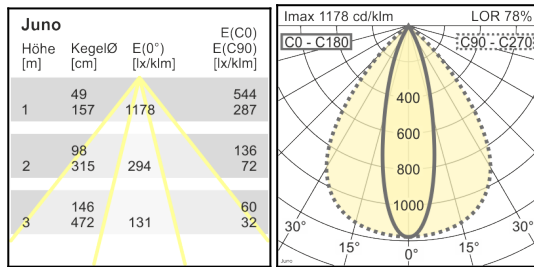

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2020-11-26