






JUNO


TRACK LIGHT


"Systematic illumination of goods thanks to optimum light distribution with visible free-form lens: track-mounted spotlight JUNO provides retail

- 



Optimum light distribution
By means of novel directional lighting control with free-form lens instead of a reflector
- 

Ideal applications
Systematic illumination of goods on back walls or on promotional areas
- 

New design language
With visible, teardrop-shaped lens and significant long-distance effect
- 

Easy alignment
Spotlight head that can be swivelled though 40°; easy, precise adjustment thanks to scale
- 





Intelligent lighting
LED^{IQ} for your smart lighting management system




JUNO

oktalite

www.oktalite.com/juno-t

Type of luminaire	track light
Application areas	Aisle zone illumination, base illumination
Pan/tilt range	355° turning range, 80° swivel range
Mounting	3P Power Track Typ Global DALI, not suitable for vertical mounting
Lighting technology	LED ^{IQ} DALI
LED Luminous Flux Class	5000 lm
Light colour White	2700 K, 3000 K, 3000 K - Efficient White, 3500 K, 4000 K
Cooling	passive
Supply unit	DALI driver integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	DALI DT6
Installation	Recommended for new installation.
Weight	Approx. 1.7 kg
Components	 Luminaire housing
Test seal	  

LED^{IQ} DALI

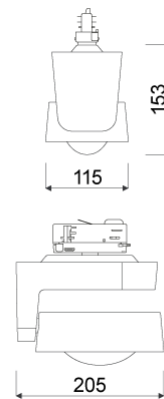

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2020-11-26



Luminaire housing - LED^{IQ} DALI

JUNO

oktalite

LED Luminous Flux Class	Light colour	CRI R _a	system luminous flux	System performance	max. luminaires B16	Order number		
						white	silver	black
5000 lm	2700 K	81	3950 lm	36 W	50	10221438	10221439	10221440
	3000 K	83	4060 lm	36 W	50	10221441	10221442	10221443
	3000 K - Efficient White	94	4260 lm	46 W	20	10221450	10221451	10221452
	3500 K	84	4140 lm	36 W	50	10221444	10221445	10221446
	4000 K	83	4280 lm	36 W	50	10221447	10221448	10221449



Efficient White: R₉ = 75, R_i = 91, R_g = 102

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2020-11-26



Optic Juno - LED ^{IQ} DALI

oktalite

Optic

Freeform lens

Type

Optic integrated

Beam angle


Oval light distribution

Cover

LOR

without

78 %

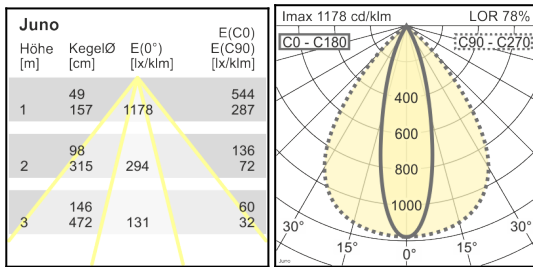

Technical details as well as weight specifications and measurements have been prepared with care. Errors excepted. All dimensions in mm · LED service life data: L80/B10 at ambient temperature (ta) 25°C. Rated lamp service life 50,000h. Luminous flux and efficiency specifications are subject to a tolerance of +/- 10%. Min CRI Ra: >80 / >90 · Product images are used as an example and may differ from the original · We reserve the right to make changes, insofar as they serve progress. Oktalite Lichttechnik GmbH · Mathias-Brüggen-Str. 73 · 50829 Cologne · T +49 221 59767-0 · F +49 221 59767-40 · mail@oktalite.com · www.oktalite.com · 2020-11-26