




## IDESTO

### RECESSED LUMINAIRES

The IDESTO wallwasher range is expanding, and now has a recessed version in addition to IDESTO TRACK for the optimal illumination of walls, graphics or images. The IDESTO recessed version brings a sense of calm to the ceiling appearance. With its low recess depth, and thanks to swivelling of the luminaire head, the spotlight can be used highly flexibly and is particularly suitable for sales areas with suspended ceilings.

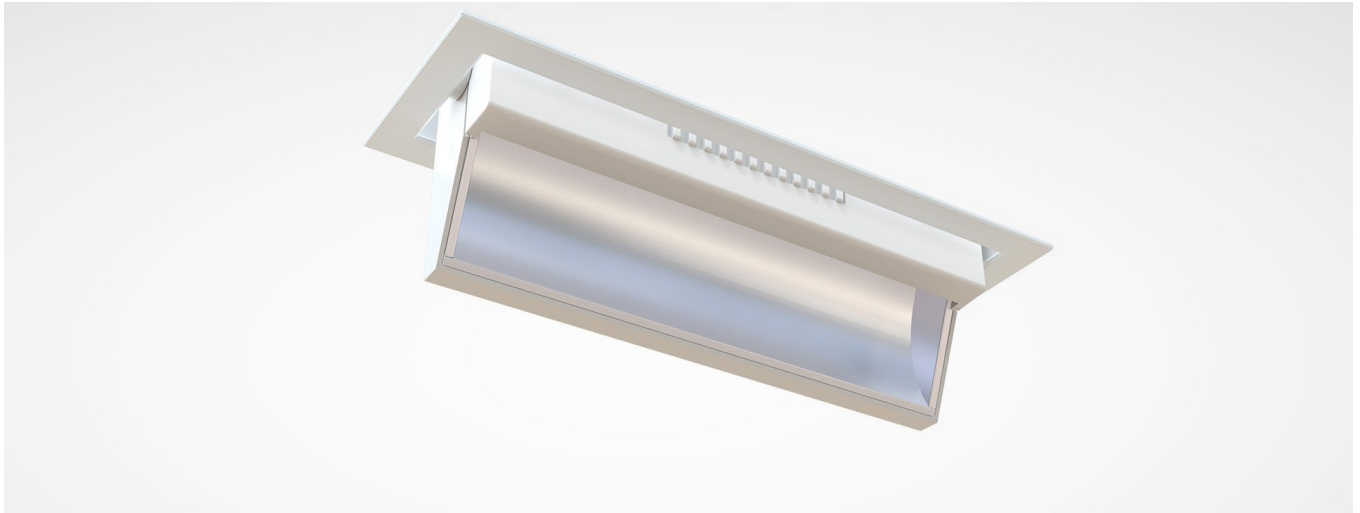

#### Uniform light

Newly developed reflector for more uniformity on the target surface – in width and depth



#### Easy readjustment

Flexible illumination due to the forward and backward swivelling of the spotlight head of up to 15°



#### Quality of light on all merchandise

All standard and special light colours from the Oktalite portfolio can be used



#### Simple mounting and removal

Oktalite proprietary folding catch attachment





#### Ideally combinable

Wide range of possibilities in interaction with all other accent spotlights from the Oktalite portfolio



#### Intelligent light

LED<sup>IQ</sup> for your smart light management



# IDESTO

[www.oktalite.com/idesto-r](http://www.oktalite.com/idesto-r)

|                         |                                                                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Luminaire type          | Recessed luminaires                                                                                                                         |
| Application areas       | Graphics illumination, wide-area merchandise illumination                                                                                   |
| Range of action         | +/- 15° tiltable                                                                                                                            |
| Fastening               | Oktalite folding spring                                                                                                                     |
| Ceiling thickness       | 1-25 mm                                                                                                                                     |
| Ceiling cut-out         | 300 x 90 mm                                                                                                                                 |
| Lighting technology     | LED, LED IQ DALI, LED IQ BLE                                                                                                                |
| Beam angel              | Wallwasher                                                                                                                                  |
| LED luminous flux class | 1500 lm - 5000 lm                                                                                                                           |
| Light colour CRI 80     | 2700 K, 3000 K, 3500 K, 4000 K                                                                                                              |
| Light colour CRI 90     | 3100 K - Brilliant Colour,<br>3200 K - Efficient White, 4000 K - Efficient Cool                                                             |
| Light colour Food       | 2700 K - Brilliant Food, Meat, Meat + Fish                                                                                                  |
| Supply unit             | Integrated driver                                                                                                                           |
| Luminaire colour        | RAL 9005 jet black<br>RAL 9016 traffic white<br>Special colours on request                                                                  |
| Surface                 | Structure powder-coated                                                                                                                     |
| Nominal voltage         | 220 - 240 V, 50/60Hz                                                                                                                        |
| Weight                  | approx. 1.3 kg                                                                                                                              |
| Test mark               | <div> <div>CE</div> <div>IP20</div> <div>  </div> </div> |

