



## LENTY MINI

### TRACK LIGHTS

Small but powerful: LENTY MINI completes the LENTY spotlight family. The miniaturized lens technology performs as focused as the big ones: Even with small lumen packages, the brighter core light sets brilliant accents wherever the focus is on a discreet appearance. For example, in multi-space offices, in smaller sales rooms or with lower ceiling heights.



#### Lens technology instead of reflector technology

More concentrated and directed light on the target surface



#### Set highlights

High light intensity at 500 or 1000 lm; Beam angle from spot, medium flood to flood



#### For all light colours CRI > 90

Authentic lighting with Brilliant Colour or Efficient White, among others





#### Compatible for store, office, architecture

Multifunctional in white or black, front ring in white and black






#### Intelligent light


LED<sup>IQ</sup> for your smart lighting management; controls from switchable, DALI, Bluetooth to BLE





## LENTY MINI

[www.oktalite.com/lenty-mini](http://www.oktalite.com/lenty-mini)

Luminaire type	Track lights
Application areas	Accent lighting in offices and retail
Range of action	Can be rotated through 355° and swiveled through 100
Fastening	3P conductor rail, not suitable for vertical mounting
Lighting technology	LED, LED IQ DALI, LED IQ BLE
Beam angel	Spot, Medium Flood, Flood, Wide Flood, Very Wide Flood
LED luminous flux class	500 lm - 1000 lm
Light colour CRI 80	3000 K, 4000 K
Light colour CRI 90	2700 K, 3000 K, 3500 K, 4000 K – Efficient Cool
Supply unit	Track Driver <b>3PTD</b> Invisible Driver <b>3PID</b>
	RAL 9005 jet black
Luminaire colour	RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated, polycarbonate (PC)
Nominal voltage	220 - 240 V, 50/60Hz
Weight	approx. 0.28 kg
Test mark	  

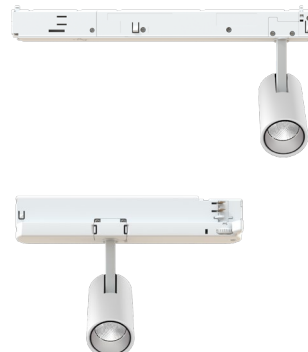

Lenty Mini 3PTD



Lenty Mini 3PID

